


Exactaire® IAQ Sensor

ESSENTIAL INDOOR AIR QUALITY MONITORING



Humidity	Accuracy: $\pm 2\%$ (typical)	Response Time: 15 Seconds
	Repeatability: $\pm 0.1\%$	Range: 0% to 100%
Temperature	Accuracy: $\pm 0.5^\circ$ F (typical)	Range: -14° C to 140° C
	Repeatability: $\pm 0.2^\circ$ F	
Carbon Dioxide (CO₂)	Accuracy: ± 60 ppm	NDIR optical CO ₂ sensor
	Range: 0 to 2000 ppm	Response time: (t 90) 3 minutes
Volatile Organic Compounds (VOC)	Accuracy: ≤ 500 Index;	Response Time: (t 33-63%) 1 s
Biometric Pressure Accuracy	Accuracy: ± 0.12 hPa;	Range (full accuracy): 300 - 1100 hPa
	Resolution: 0.18 pa	
Power	(4) Lithium (Li-SOCI ²) AA Batteries	Life expectancy - up to 2 years
Communication	Wireless; 915 mHz	
Sensor Coverage	4,000 – 5,000 square feet (unobstructed conditions)	
Size & Weight	Commercial: 4 ¾" x 3 ¼" x 1", 0.5 lbs	
	Industrial: 8 ¼" L, 6" W, 1 ⅞" D, 1 lbs	

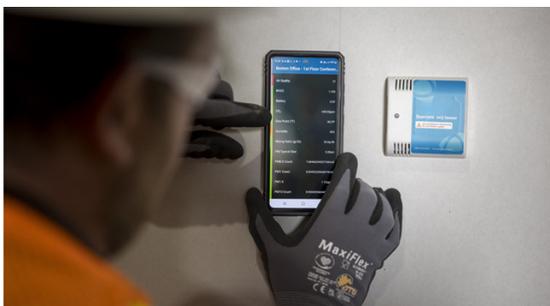

BATTLEFIELD



**T H E
Rental
S T O R E .**