


Exactaire® Multi Sensor

ABLE TO MEASURE A VARIETY OF PARAMETERS USING ACCESSORY PROBES

Onboard Temperature and Humidity	Accuracy: $\pm 0.5^{\circ}$ F
	0-95% RH non-condensing
	Response Time: ≥ 2 seconds
	Range: 14° F to 140° F
Temperature	Accuracy: ≥ 8 seconds RH
	Range: 0% to 100%
Power	Battery operated
	Life expectancy - up to 2 years
Communication	LoRa™ WAN (cloud-based)
	Requires communications gateway
Sensor Coverage	4,000 – 5,000 square feet
	(unobstructed conditions)
Size & Weight	4.45" x 1.61" x 1.10", 0.21 lb

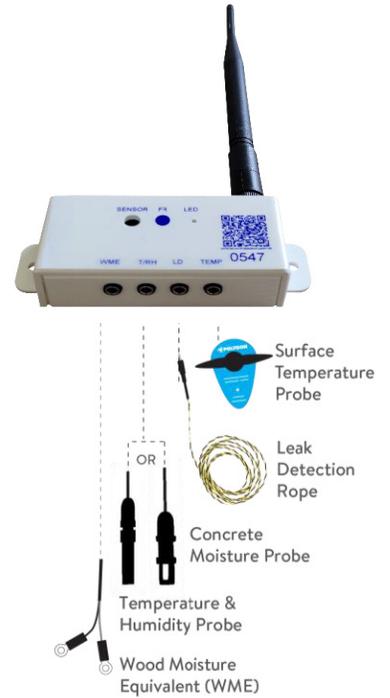

Accessory Probes and External Sensors

<ul style="list-style-type: none"> Temp and Humidity Probe 	<ul style="list-style-type: none"> Wood Moisture Equivalent (WME) Probe
<ul style="list-style-type: none"> Concrete Moisture Probe 	<ul style="list-style-type: none"> Surface Temperature Probe

